



**RAISING PERFORMANCE WITH THE PUSH OF A BUTTON.**

**APPLICATIONS**



Surveillance



Communications



Tactical Support



Lighting

**SMALL TOWER SERIES OPTIONS**

- Generators
- Cable Mgmt Reels
- Battery Powered
- Guy Wires
- Solar Charging
- Payload Mounts
- Truck Mount Skid
- Digital Height Positioning

**STS-6**  
(Small Tower Series)

**AGILE**




**STS-12**  
(Small Tower Series)

**VERSATILE**



**ISO-110/220**  
(Container Tower System)

**MODULAR**

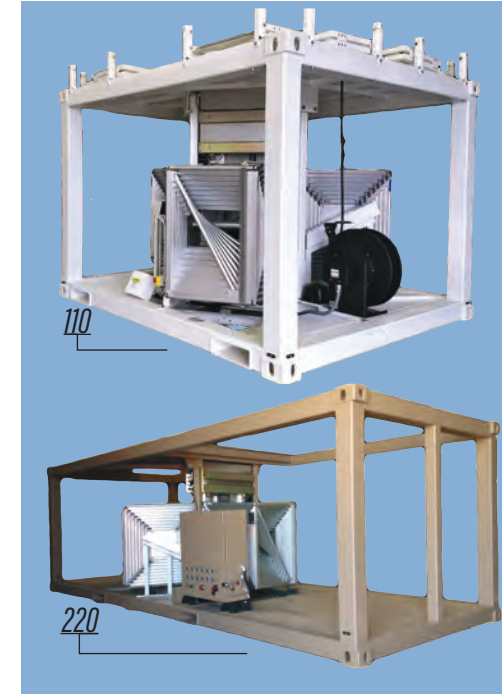

	STS-6			STS-12		ISO-110	ISO-220
Fully Deployed Height	12'	16'	20'	20'	33'	50', 80'	50', 80'
Time to Max Deployed Height	36 Seconds	48 Seconds	60 Seconds	90 Seconds	2 Minutes	5 Minutes	5 Minutes
Set Up Time	Less than 2 Minutes <sup>1</sup>			Less than 2 Minutes <sup>1</sup>		5-15 Minutes <sup>1</sup>	5-15 Minutes <sup>1</sup>
Ability to Stop at Any Height	Yes			Yes		Yes	Yes
Top Payload Capacity	150 lbs	125 lbs	100 lbs	500 lbs		2000 lbs <sup>2</sup>	2000 lbs <sup>2</sup>
Approximate Tower Weight	153 lbs	168 lbs	183 lbs	450 lbs	600 lbs	8150 lbs	10,000 lbs
Overall Dimensions (Stowed)	40" W x 35" L x 28" H			48" W x 46" L x 44" H		96" W x 117.8" L x 82.5" H	96" W x 238.4" L x 82.5" H
Footprint (Deployed)	40" x 35"			63.5" x 55.5"		96" x 117.8"	96" x 238.4"

<sup>1</sup> Depending on Options/Conditions

<sup>2</sup> Higher Payload Capacities Available, Contact Tower Solutions for More Information



**TOWER SOLUTIONS**  
 RAISING PERFORMANCE WITH THE  
 PUSH OF A BUTTON.

**APPLICATIONS**



Surveillance



Communications



Tactical Support



Lighting

**LARGE TOWER SERIES OPTIONS**

- Generators
- Lighting Protection
- Guard Rails
- Auxiliary Fuel Tank
- Lightweight Trailer
- Guy Wires
- AC Cooled Shelters
- Customization

**PTM-100**

(Large Tower Series)

**UTILITY**



**PTM-130**

(Large Tower Series)

**TACTICAL**



**PTX-100**

(Large Tower Series)

**UNSHAKEABLE**



	PTM-100		PTM-130		PTX-100 <sup>3</sup>	
Fully Deployed Height	50'	80'	50'	80'	50'	80'
Time to Max Deployed Height	3 Minutes	5 Minutes	3 Minutes	5 Minutes	3 Minutes	5 Minutes
Set Up Time	5-15 Minutes <sup>1</sup>		5-15 Minutes <sup>1</sup>		5-15 Minutes <sup>1</sup>	
Ability to Stop at Any Height	Yes		Yes		Yes	
Top Payload Capacity	2000 lbs <sup>2</sup>		2000 lbs <sup>2</sup>		2000 lbs <sup>2</sup>	
Approximate Tower Weight <sup>1</sup>	11,600 lbs	12,500 lbs	9,990 lbs	10,800 lbs	15,200 lbs	16,000 lbs
Overall Dimensions (Stowed)	101" W x 218" L x 125" H		97" W x 221.5" L x 104.4" H		101" W x 300" L x 139" H	
Footprint (Deployed)	20' x 20'		20' x 20'		40' x 40'	

<sup>1</sup> Depending on Options/Conditions

<sup>2</sup> Higher Payload Capacities Available, Contact Tower Solutions for More Information

<sup>3</sup> Guy Wires Attach to Outriggers; Does not Break Ground